

UNIXCAM

Model 85

Specs & Versions

360° VIEW DISPLAY - STANDARD ON ALL MODELS


Characteristics:	Description:
Counting Speed:	Up to 1500 notes/min.
Display Type:	LED: 4-digit total display, 3-digit batch display 8-digit value display
Input Hopper Capacity:	500 circulated notes. Up to 700 notes with display extension
Document Size Limits:	110 x 185 ~ 50 x 90 (mm)
Output Stacker capacity:	Up to 200 circulated notes
Error Detection:	Double/Chain/Half-note/Jam
Power consumption:	40W
Dimensions:	280 x 240 x 330mm
Weight:	Net 6.95 Kg
Power source:	Free voltage (AC 85 ~ 264V, 50/60Hz)

Model	D (Depth)	UV	MG	ST	Piece Count
85D	√				√
85UD	√	√			√
85UMD	√	√	√		√
85UMD-ST	√	√	√	√	√

	3D	UV	MG	ST	IR
85V	√				
85UV	√	√			
85UMV	√	√	√		
85UMI	√	√	√		√
85UMV-ST	√	√	√	√	√

V - Value & Piece Count
RS-232 - standard in all models

ST - Security Thread
Optional: printer for V models

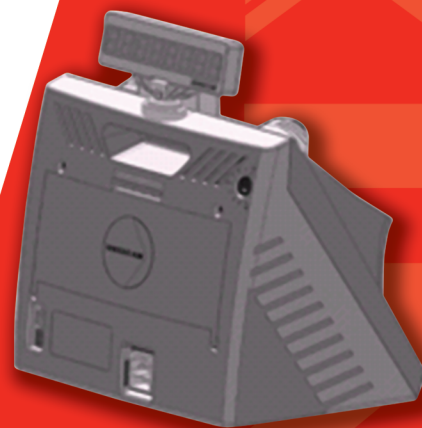

UNIXCAM GROUP LLC

3350 SW 148th Avenue | Suite 220 | Miramar, Florida 33027
T: 954-432-8801 | F: 954-432-0903
E: info@unixcam.com | www.unixcam.com